

DMI 511

Digital Measuring Instrument

■ The Digital Measuring Instrument **DMI 511** is a microprocessor controlled device for measuring AC, DC and impulse voltages. The instrument can also be used for firing a generator or a chopping sphere gap and to trigger an oscilloscope or any other measuring device. The triggers can be set for delays in time and in phase.

The three separate measuring channels, as well as the trigger function are usable individually or in combination and can be activated by a software code.

The DMI 511 has implemented a flash detector which stores and shows the last voltage measurement and its polarity before a breakdown or flashover occurs.

The instrument is specially designed for use in high voltage laboratories where a high degree of accuracy is necessary.

Typical main applications of the DMI 511 include measurements of a voltage divider output or for automated product testing where the DMI 511 is integrated into a complete control and measuring platform.

The instrument is built into a 19" standard housing with 3 height units. For ease of use the DMI 511 is equipped with a 5.2" liquid crystal display and a numerical keypad.

For remote control or data transfer the DMI 511 provides an RS 232 or a IEEE 488 interface. AC and DC measurements can be printed directly via a separate plotter port on an external X-Y graph recorder.

For verifying AC voltage wave shapes the DMI 511 has implemented an AC out interface which can be connected to a CRO or other oscilloscopes.

As a measuring device the DMI 511 is in accordance to the international standard IEC 60060-2.

On customer request HAEFELY is able to calibrate the DMI 511 according to DKD (German Calibration Services) which is traceable to highest national and international standards.



FEATURES

- ☑ AC voltage measurement by capturing rms, peak and peak/ $\sqrt{2}$ values.
- ☑ AC voltage measurement by capturing rms, peak and peak/ $\sqrt{2}$ values.
- ☑ DC voltage measurement and evaluation of mean value and ripple factor.
- ☑ Impulse voltage measurement by capturing peak values of lightning or switching impulses.
- ☑ Impulse current measurement by acquiring the voltage across a current shunt.
- ☑ Triggering of generator and chopping gaps and any other measuring device.
- ☑ Flash detection of AC and DC flashovers. The generator can automatically be stopped from recharging.
- ☑ Remote control to operate the unit from a computer or a laptop.

BENEFITS

- Easy to operate. Large LCD screen, case sensitive softkeys and special function keys reduce setup time and ensure intuitive and safe handling.
- Simple to upgrade. Software codes are used for activating the individual measuring modes. Uninstallation, transportation and reinstallation gets therefore superfluous.
- Accurate and reliable. Well established hardware and extensively tested software allows meaningful and credible measurements.
- Customized solution. Due to the flexibility of the DMI 511 many HV measuring applications can be covered with this single device. Cost effective investments are therefore guaranteed.

APPLICATIONS

- Transformer Testing
- Switchgear Testing
- Surge Arrestor Testing
- Research and Development

INTERFACES

AC MEASUREMENT

Measurement modes	peak, peak/ $\sqrt{2}$, rms
Voltage range	0 ... 150 V rms
Frequency range	16 $\frac{2}{3}$... 40 H ¹ 40 ... 400 Hz ²
Accuracy	¹ $\pm 1.0\%$ rdg, ± 3 counts ² $\pm 0.5\%$ rdg, ± 3 counts

DC MEASUREMENT

Measurement modes	mean value, ripple
Voltage range	0 ... 7.5 V
Ripple range	0 ... 0.5 V, 50 ... 1000 l
Accuracy	$\pm 0.5\%$ rdg, ± 3 counts

IMPULSE MEASUREMENT

Measurement modes	peak value
Voltage range	0 ... 400 V (BNC jack) 0 ... 1600 V (LEMO 4250)
Accuracy	$\pm 1\%$ rdg, ± 3 counts

POWER SUPPLY

Line voltage	85 ... 264 V AC
Line frequency	50/60 Hz
Power consumption	30 W

TRIGGERING

Generator gap	manual or automatic
Chopping gap	0 ... 2000 μ s
Oscilloscope	-20 ... 2000 μ s
Phase synchronisation	0 ... 360°

INTERFACES

Remote control	IEEE 488 or RS 232
X-Y recorder	BNC 2 k Ω , 0 – 10 V DC
AC out	BNC 2 k Ω , 0 – 10 V AC

SYSTEM CONFIGURATION

Processor	386 SX, 25 MHz
Monitor	5.2" LCD, 240 x 128 pixels
Keyboard	membrane type, 31 keys

ENVIRONMENTAL CONDITIONS


Operating temperature	10 ... 40° C
Humidity range	35 ... 80 % r.h., n.c.

WEIGHT AND DIMENSION

Weight	6.6 kg
W x H x D	450 x 135 x 350 mm

INTERFACES

- 1 Power supply switch
- 2 Impulse inputs
- 3 AC input/output
- 4 DC input, Trigger outs
- 5 Trigger delay
- 6 X-Y recorder output
- 7 Remote control

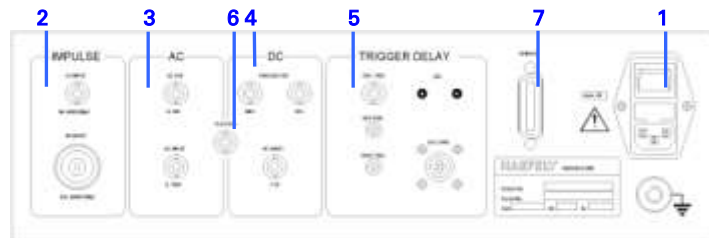

ORDER INFORMATION

Name	Description	Ordering No.
DMI 551	Digital Measuring Instrument in a 19" desktop housing	2495511
DMI 551 RACK	Digital Measuring Instrument as a 19"/3HU rack version	2495512
DMI AC	Software code for using the AC mode	2482733
DMI DC	Software code for using the DC mode	2479211
DMI IMP	Software code for using the impulse mode	2482743
DMI ZAG	Software code for using the trigger mode (DMI DC required)	2474871
DMI REMOTE	Software code for using the remote control mode	2497431
DMI LEMO	LEMO T adapter for current measurements	0751611
DMI MATCH	Matching resistor 75 Ω for LEMO T adapter	2129470